


24" Military Grade Full IP67 Monitor

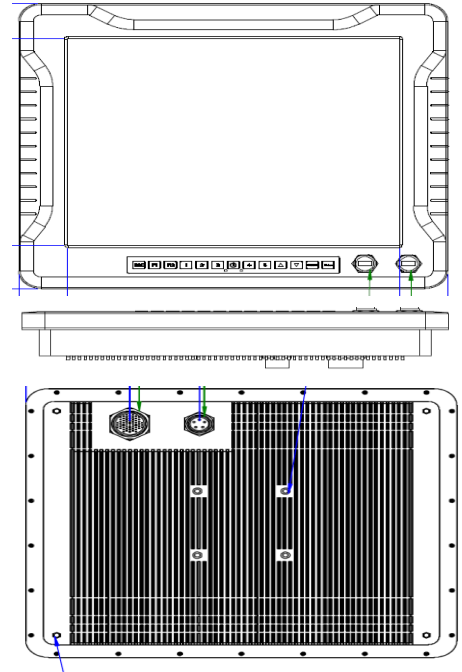

Features:

- Full-IP67 Protection
- Anti-Corrosion Alu. Fin Housing
- OSD Function Keys on Front Panel

Specification

Environment Tolerance :

• Operating Temperature	: -30 deg. C to 70 deg. C
• Storage Temperature	: -30 deg. C to 80 deg. C
• Humidity	: 10 to 95% (Non Condensing)
• Shock	: MIL-STD-810G Method 516.6
• Vibration	: MIL-STD-810G Method 514.6C-
• Humidity	: MIL-STD-810G Method 507.5-7
• High Temperature	: MIL-STD-810G Method 501.5-II
• Low Temperature	: MIL-STD-810G Method 502.5
• EMI Compliance	: MIL-STD-461F, CE101, CE102, RE101, RE102, CS101, CS114, CS115, CS116, RS101, RS103
• IP Level	: Full IP67

Dimensions :

• Dimensions	: 590 (W) x 400(H) x 72.5 (D) mm
• Weight	: 14KG

Function Key :

• Power Button	: 1 x Power Button
• Up / Down Arrow	: Brightness Control Buttons
• Other Buttons	: Reserved for user definition
• LED Indicators	: 1 x Power On/Off

Panel Specification :

• Size/ Type	: 24" LCD (LED backlight)
• Active Area (mm)	: 531.36 (H) x 289.89 (V)
• Pixel Pitch (mm)	: 0.27675 (H)x 0.27675 (V)
• Resolution	: 1920 x 1080 @ 60Hz
• Contrast Ratio	: 5000 : 1 (typ.)
• Max. Colors	: 16.7M colors
• Brightness	: 300 nits (cd/m ²) Optional 1000 nits
• Viewing Angle	: -89 ~ 89 (H); -89 ~ 89 (V)
• Touch Screen	: P-cap multi touch screen

Input / Output :

Back Side I/O (D38999/24WH53SN)	: 1 x PAL/ NTSC Input
	: 1 x DVI Input
	: 1 x VGA Input
Back Side I/O (D38999/26WD5PN)	: 1 x DC 16~32V Input
Front Side I/O (optional)	: 2 x IP67 Type A USB 2.0 connectors (Optional)

Order Options :

• Optical Bonding	: Optical bonding between panel and glass (or touch screen)
• High Brightness	: 1,000 nits for optional
• Table Stand	: Table Stand for optional

